

Ceel-Co® 300 Series PVC

Fitting Covers and Jacketing for Commercial and Industrial Applications

Description

Ceel-Co 300 Series PVC heavy-duty fitting covers and Ceel-Co PVC jacketing are specifically designed for industrial and commercial applications.

Because of their added thickness and improved thickness distribution, they exhibit excellent impact resistance, increased durability, superior UV resistance and reduced chance of "burn through" when solvent welding.

Ceel-Co 300 Series PVC fitting covers are produced from a white, glossy, high-impact, UV-resistant polyvinyl chloride compound. Available in many shapes and sizes, they fit quickly and snugly over a variety of pipe fittings.

A variety of fitting covers and jacketing are available in color. They are recommended for indoor use only and are not UV resistant or 25/50 rated. Call for availability.

Made from the same rugged, pliable PVC material, Ceel-Co PVC jacketing is designed to match the Ceel-Co 300 Series fitting covers. For use over insulated pipe and bare metal, the PVC jacketing is easy to install and maintain, provides an inherent vapor retarder and will withstand water and most chemical and low-solvency washdowns.

Available Shapes and Sizes

Fitting Covers. Ceel-Co 300 Series heavy-gauge PVC fitting covers are available in many shapes and sizes. Its two-piece or two-piece welded construction provides ease of fabrication in the field not available in a traditional one-piece fitting cover. This construction is engineered to accommodate various types of fabricated insulation fittings and an improved "matched" fit in the fitting throat area when solvent welding.

Ceel-Co 300 Series heavy gauge is available in shapes for 90° and 45° (1.6 and 0.8 rad.) short- and long-radius elbows, tees and valves plus a wide variety of other fittings, flanges, reducers, end caps, soil pipe hubs, traps and mechanical line fittings. IPS sizes are available from ½" through 24" (13 mm through 610 mm); CT sizes from ⅝" through 6⅞" (16 mm through 156 mm).


Rolls. Ceel-Co PVC jacketing is available in standard thicknesses of 10, 15, 20, 30 and 40 mil (0.3, 0.4, 0.5, 0.8 and 1.0 mm) and in standard widths. Nonstandard sizes are available on special request.

Cut & Curled® Jacketing. Ceel-Co 300 Series heavy-gauge fitting covers may be used with Ceel-Co PVC Cut & Curled jacketing for perfect fit and color match. The jacketing is available in both white and colors (indoor use only) for Ceel-Co 300 Series fitting applications.

The 30 mil (0.8 mm) thickness is recommended for outdoor applications.

Custom Shapes and Sizes

For fitting covers and Cut & Curled jacketing sizes larger than 20" (508 mm) and custom shapes and sizes, call for availability.

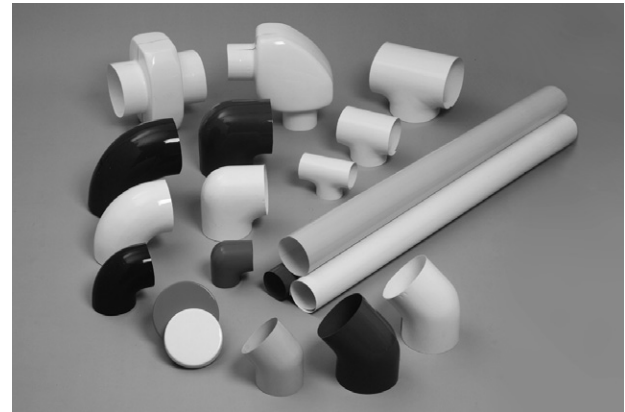

Operating Temperature Limits:

PVC: up to 150°F (66°C)

Flame Spread: 25 or less (up to 30 mil [0.8 mm]) (white only)

Smoke Developed: 50 or less (up to 30 mil [0.8 mm]) (white only)

Grade: weatherable

Color: white and colors (for indoor use only)

Finish: gloss

Applications

For insulating and protecting indoor and outdoor industrial and commercial piping systems, Ceel-Co 300 Series PVC coverings are the ideal replacement for aluminum, stainless steel and most other ordinary insulation coverings. For use with Micro-Lok® HP fiber glass pipe insulation and a variety of other pipe insulations. The fitting covers, combined with Ceel-Co PVC jacketing and Perma-Weld® Adhesive form a completely sealed system that meets the requirements of USDA and FDA for use in the food processing, beverage and pharmaceutical industries.

Advantages

Exceptional Durability. The tough, durable Ceel-Co 300 Series PVC coverings resists damage from impact and will withstand humidity, salt water, adverse weather conditions and most industrial fumes. In addition, the jacketing will not support combustion.

Weatherability. When used outdoors, the ultraviolet-resistant PVC jacketing and fitting covers need not be painted or coated.

Corrosion Resistance. Unlike aluminum or most stainless steel jacketing materials, Ceel-Co PVC coverings is immune to galvanic or electrolytic corrosion.

Ease of Maintenance. The jacketing and fitting covers are easily washed down with soap and water and most commercial cleaners. The ability to be easily cleaned, combined with the nontoxic, odorless and tasteless properties of the material and its attractive appearance, make it especially suitable for food, beverage and pharmaceutical applications.

Simple, Fast Installation. The Ceel-Co 300 Series fitting cover and jacketing are easy to apply with the special Perma-Weld 300 adhesive, which is similar in composition to the PVC jacketing material. The result is a monolithic system. Suitable bands may be used when required.

Ceel-Co® 300 Series PVC

Fitting Covers and Jacketing for Commercial and Industrial Applications

Specification Compliance

USDA, Agriculture Canada New York City MEA #7-87	L-P-535E,* Composition A, Type II, Grade GU
ICBO SBCCI BOCA ASTM D1784, Class 16354-C	L-P-1035A,* Composition A, Type II, Grade GU Canada: CAN S102-M88 CGSB 51-GP-53M

*Impact strength determined by Gardner—SPI test method rather than Izod, since Gardner is more appropriate for PVC sheeting materials.

Physical Properties

Property	Value	ASTM Test Method
Specific Gravity	1.48	D792
Tensile Strength at Yield, psi (kPa)	6,000 (41,370)	D638
Elongation at Yield (MD), %	3.0	D638
Tensile Modulus, psi (kPa)	470,000 (3,240,650)	D638
Flexural Strength, psi (kPa)	11,600 (79,982)	D638 (min. 0.125" [3mm] thick specimen)
Flexural Modulus, psi (kPa)	460,000 (3,171,700)	D790
Flame Spread	25 or less (up to 30 mil [0.8 mm])	E84
Smoke Developed	50 or less (up to 30 mil [0.8 mm])	E84
Electrical Conductance	Non-Conductor	D257
Gardner—SPI Impact, in. lb./mil by Ductile Failure	10 mil (0.3 mm) 1.3 15 mil (0.4 mm) 1.4 20 mil (0.5 mm) 1.5 30 mil (0.8 mm) 1.6	D3679 (4 lb. [1.8 kg] weight; 8 lb. [3.6 kg] for 30 mil [0.8 mm])

Note: Chemical resistance data available on request.



717 17th St.
Denver, CO 80202
(800) 654-3103
specJM.com
CI-83 08/11 (Replaces 10/08)

North American Sales Offices, Insulation Systems

Eastern Region
P.O. Box 158
Defiance, OH 43512
(800) 334-2399
Fax: (419) 784-7866

Western Region and Canada
P.O. Box 5108
Denver, CO 80217
(800) 368-4431
Fax: (303) 978-4661

The physical and chemical properties of Ceel-Co® 300 Series PVC Fitting Covers and Jacketing listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Numerical flame spread and smoke developed ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions. Check with the Regional Sales Office nearest you to assure current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, including Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions, Limited Warranty and Limitation of Remedy and information on other Johns Manville thermal insulation and systems, call (800) 654-3103.

♻️ Printed on recycled paper.

© 2011 Johns Manville. Printed in USA.