

Description


DeckPro is a nailable felt base sheet with a nonwoven polyester mat and an aluminum foil facer that allows for superior adhesion to self-adhering bitumen sheets. When used with JM CleanBond® SBS Base and Cap sheets, DeckPro provides an easy-to-install, self-adhering roofing system. With this system there is no need for hot asphalt, and the structural deck is not compromised because the bituminous sheet is not adhered directly to it. The polyester mat provides tensile strength, toughness and puncture resistance, and can accommodate stresses created by typical rooftop expansion and contraction forces.

Advantages

- The foil facer provides excellent adhesion to self-adhering membranes and eliminates damage to the structural deck.
- The polyester mat provides exceptional puncture and tear resistance.
- The sheet can be easily nailed directly to the deck.

Nailing Pattern

1" (2.54 cm) Diameter Cap Nails

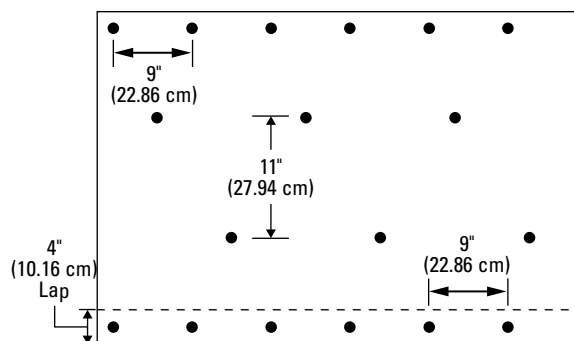


Use

DeckPro is an approved substrate under Johns Manville self-adhering modified bitumen membranes. It is a nailable base sheet that eliminates adhesion of the membrane directly to the deck.

Nailing Pattern

UltraFast® Fasteners (Phillips) with Plates

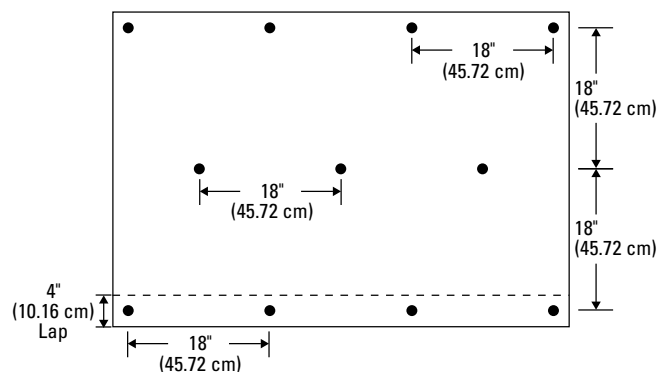

Typical Physical Properties*

Thickness	35.6 mil (0.9 mm)
Tensile Strength	
Machine Direction	.74.7 lb force/in. width (13.07 kN/m)
Cross Machine Direction	.75.7 lb force/in. width (13.25 kN/m)
Elongation	
Machine Direction	31%
Cross Machine Direction	30%
Tensile-Tear	
Machine Direction	141.0 lb/in. (24.68 kN/m)
Cross Machine Direction	96.5 lb/in. (16.89 kN/m)
Thermal Stability	0.00"

* Material tested in accordance with ASTM D 5147 and ASTM D 1970.

Sizes

Roll size	700 ft ² (65.03 m ²)
Roll weight	50 lb (22.68 kg)
Roll length	227' (69.19 m)
Roll width	40" (1.02 m)



Refer to the Material Safety Data Sheet and product label prior to using this product.