

**JM Johns Manville**  
51 Lexington Street  
Lewiston, ME 04240-3513  
800-445-1500 USA & Canada  
207-784-0125 Fax

### EXPAND-O-GARD INSTALLATION INSTRUCTIONS


NOTE: The adhesive and urethane sealant included in the carton are for use where adjoining sections of Expand-O-Gard are overlapped at time of installation.

Fasteners and other sealants are the responsibility of the installing contractor. Fasteners should be rubber grommetted or embedded in sealant to prevent water penetration.



The building surface to which the flanges are to be attached must be smooth and clean.

#### INSTALLATION INSTRUCTIONS:

1. Embed flanges in continuous bead of water proofing grade sealant. Apply second bead down outer edge of flange once installed.

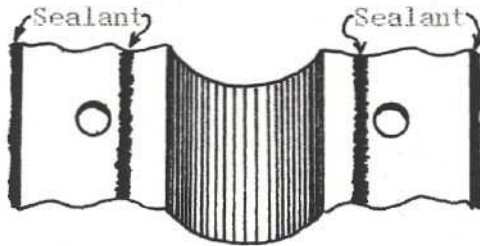

2. Overlap adjoining sections 4" shingle fashion.

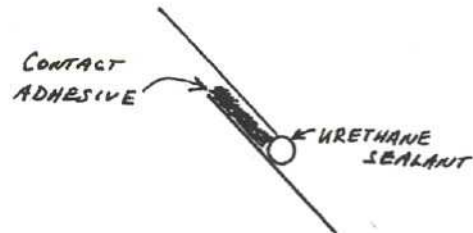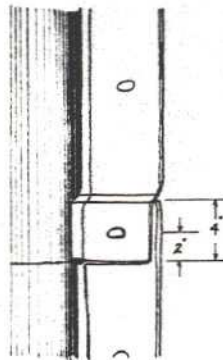

3. Coat the overlapping neoprene surfaces with the contact adhesive using the brush provided. Allow the adhesive to dry until no longer wet to the touch then press the two surfaces together.
4. Caulk the overlap seam line using the urethane sealant supplied in the installation kit.