

Description


Fesco Board HD Roof Insulation is a 1" (2.54 cm) thick, high density homogeneous rigid insulation board, composed of expanded perlite, blended with selected binders and cellulosic fibers. The expanded perlite contains air cells which provide superior insulating efficiency. The top surface is sealed with a special TopLoc® coating to prevent excessive absorption of asphalt during the installation process. Fesco Board HD meets the strength requirements of ASTM C 728.

Use

Fesco Board HD Roof Insulation Board is a special made-to-order product for use directly over a wide flute or metal deck applications. Fesco Board HD can span up to a 2½" (6.35 cm) wide deck spanability, and can be used under BUR, modified bitumen and some single ply roofing systems using hot asphalt, mechanical fasteners, and cold adhesives. It has been rated in numerous FM Global® 1A-60, 1A-90 fire and wind-resistant systems and is also approved for use in specific Underwriters Laboratories Inc. Class A constructions and Roof/Ceiling hourly fire-rated (P design) assemblies. Materials will have UL® labels only when requested on the order.

Advantages

- Spans up to 2½" (6.35 cm) wide metal deck
- Resists damage from construction and maintenance
- Excellent substrate for most roofing membranes
- Superior fire resistance
- Dimensionally stable
- TopLoc coating ensures proper membrane adhesion

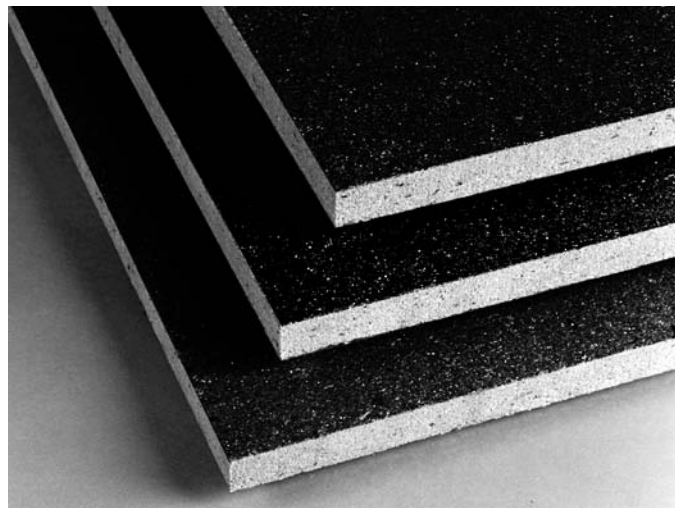

Energy and the Environment

LEED®	Recycled Content:	27% average For post and pre-consumer recycled content, visit the Fesco Board product page on the JM roofing Web site.
	Producing Location:	Rockdale, IL



Typical Physical Properties

	Values	Test Method
Metal Deck Spanability, inchesUp to 2½" (6.35 cm)		
Water Absorption		
% Volume – 2 hours	1.5%	ASTM C209
Compression Resistance		
5% Consolidation, psi	30 (207 kPa)	ASTM C 165
10% Consolidation, psi	45 (311 kPa)	
Laminar Tensile Strength, psi	7 (48 kPa)	ASTM C 209
Flexural Strength, psi	80 (552 kPa)	ASTM C 203
Product Density, pcf	10.0 (160 kg/m³) nom.	ASTM C 209
Linear Expansion, % max	0.5	ASTM C 209

Thermal Performance

Thickness in.	cm	Nominal C-Value (Conductance)		Nominal R-Value (Resistance)	
		BTU/(hr·ft²·°F)	W/m²·°C	(hr·ft²·°F)/BTU	m²·°C/W
1	2.54	0.36	2.04	2.78	0.49

Sizes

Fesco Board HD is available in 1" (2.54 cm) thickness and 4' x 4' (1.22 m x 1.22 m) board size on a special made-to-order basis only. Please allow minimum two-week lead time for manufacturing production scheduling.

Refer to the Material Safety Data Sheet and product label prior to using this product.