

Description

GlasKap CR is a white mineral-surfaced, white acrylic-coated fiber glass cap sheet for use in built-up roofing systems.

Use

GlasKap CR is used as the uppermost finish ply in a variety of built-up roofing systems. The unique surfacing provides protection to the underlying asphalt and membrane, as well as the benefit of a reflective, emissive surface **that meets California Title 24.**

Color

GlasKap CR is available in white only.


Advantages

- Meets same ASTM as GlasKap.
- Same installation as standard GlasKap.
- UL® Class A and FM Global® fire approvals.
- Easy to maintain.

JM GlasKap CR meets California Title 24 under the Standard Prescriptive Approach.



Energy and the Environment

 <p>COOL ROOF RATING COUNCIL MEMBER</p>	Solar Reflectance	Initial 0.76	Weathered Pending
	Thermal Emittance	0.85	Pending
	Rated Product ID	0662-0007	
	Licensed Manufacturer ID	0662	
	Classification	Production Line	
<p>Cool Roof Rating Council ratings are determined for a fixed set of conditions, and may not be appropriate for determining seasonal energy performance. The actual effect of solar reflectance and thermal emittance on building construction may vary.</p> <p>Manufacturer of product stipulates that these ratings were determined in accordance with the applicable Cool Roof Rating normal procedures.</p>			


CA Title 24 (CRRC) Compliant	Reflectivity .76	Emissivity .85
LEED®	Recycled Content: 0%	SRI 93
Producing Locations: Oklahoma City, OK		

Typical Physical Properties

Material meets the requirements of ASTM D 3909.

Sizes

Roll size	100 ft ² (9.29 m ²)
Roll weight	78 lb (35.4 kg)
Roll length	36' (10.97 m)
Roll width	36" (914 mm)
Rolls per pallet	30
Pallets per truckload	19
Pallet size	45 in ² (29,032 mm ²)
Pallet weight	2,375 lb (1,077.3 kg)

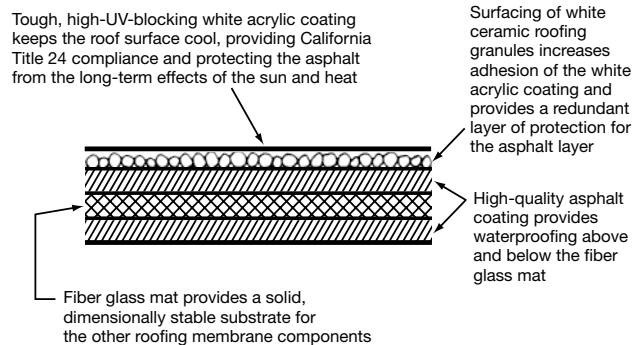

Refer to the Material Safety Data Sheet and product label prior to using this product.