



Single Ply Roofing Systems (EPDM) JM EPDM Flashing

Description

JM EPDM Flashing is a 60 mil (1.52 mm) thick, uncured EPDM (ethylene propylene diene monomer) flashing sheet with a diamond texture on the top side and a white release liner.

Use

For use in flashing and joints at corners and irregular penetrations that cannot be properly handled with cured EPDM membrane.

For use with bonding adhesive. This product is formulated to cure once installed.

Color

Black

Physical Properties After Curing

Thickness	60 mil (1.52 mm)
Tensile Strength	1000 psi (6895 kPa)
Tear Resistance (min.)	150 lb/in. (26.3 kN/m)
Elongation	300%
Brittle Point	-49°F (-45°C)
Weight	0.29 lb/ft ² (1.4 kg/m ²)
Ozone Resistance	No Cracks
Resistance to Weathering	No Cracks/No Cracking

Packaging

6" (15.24 cm) Flashing

2 rolls per box, 200 lin ft (60.96 lin m) per box

42 lb (19 kg) per box

9" (22.86 cm) Flashing

1 roll per box, 100 lin ft (30.48 lin m) per box

32 lb (15 kg) per box

12" (30.48 cm) Flashing

1 roll per box, 100 lin ft (30.48 lin m) per box

42 lb (19 kg) per box

18" (45.75 cm) Flashing

1 roll per box, 100 lin ft (30.48 lin m) per box

62 lb (28 kg) per box

24" (60.96 cm) Flashing

1 roll per box, 100 lin ft (30.48 lin m) per box

82 lb (37 kg) per box

Roll Sizes


6" x 100' (15.24 cm x 30.48 m)

9" x 100' (22.86 cm x 30.48 m)

12" x 100' (30.48 cm x 30.48 m)

18" x 100' (45.72 cm x 30.48 m)

24" x 100' (60.96 cm x 30.48 m)

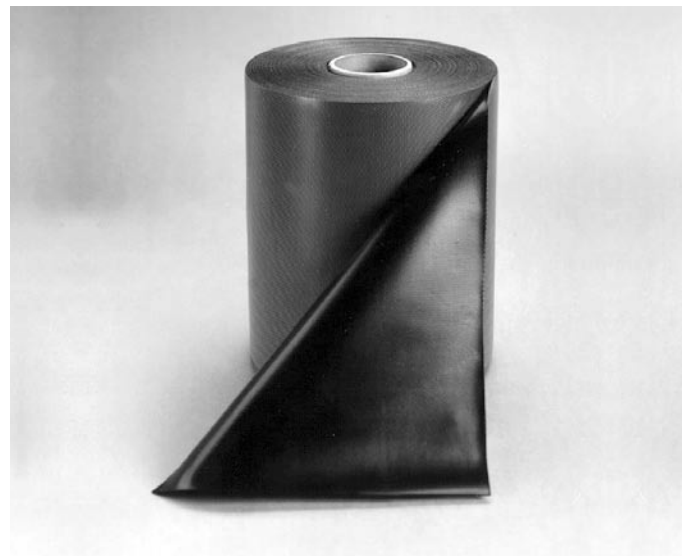

Shelf Life

Nine months from manufacture date when stored properly (see storage section). Storage temperatures exceeding 90°F (32°C) may affect shelf life.

Storage

Keep product clean and dry prior to application. Store indoors, out of direct sunlight, at temperatures between 60°F and 80°F (16°C and 27°C).

Application

Refer to JM EPDM Applicator Guides or Detail Drawings for instructions.

Precautions

Do not install in direct contact with asphalt or coal tar pitch.

Refer to the Material Safety Data Sheet prior to using JM EPDM Flashing. Material Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.