



Single Ply Roofing Systems (EPDM) JM EPDM Peel & Stick Sealing Strip

Description

JM EPDM Peel & Stick Sealing Strip is a cured, 6" (15.24 cm), 9" (22.86 cm) or 12" (30.48 cm) wide, EPDM (ethylene propylene diene monomer) strip with a matte finish and factory laminated, self-adhering seam tape. This product is formulated to 1) provide high initial strength in both peel and shear at typical rooftop temperatures, 2) improve the speed of application, and 3) improve the quality and performance of the lap on JM EPDM roofing systems.

Use

Use for "strip in" applications in flashing details, gravel stops and roof field. Provides additional reinforcing strength and moisture protection at the lap area of adjoining EPDM sheets. No additional edge caulking is required when stripping in gravel stops since the self-adhering seam tape is self-caulking and wider than the EPDM membrane. Where self-cement strips intersect or overlap, JM recommends lap caulk for the side laps.

Color

Black

Physical Properties of the Peel & Stick Tape*

Peel Strength (ASTM D 413 @ 70°F [21°C]).8 - 10 pli (1.43 - 1.79 kg/cm)
Shear Strength (ASTM D 816 @ 70°F [21°C])35 - 45 psi (241 - 310 kPa)
Thickness	
Membrane Thickness	0.030" (0.76 mm)
Tape Thickness	0.035" (0.89 mm)
Total Thickness	0.065" (1.65 mm)

* The cured JM EPDM Peel & Stick Sealing Strip meets or exceeds the requirements of ASTM D 4637.

Packaging

6" (15.24 cm) Peel & Stick Sealing Strip


2 rolls per box, 200 lin ft (60.96 lin m) per box
42 lb (19 kg) per box

9" (22.86 cm) Peel & Stick Sealing Strip

1 roll per box, 100 lin ft (30.48 lin m) per box
30 lb (14 kg) per box

12" (30.48 cm) Peel & Stick Sealing Strip

1 roll per box, 100 lin ft (30.48 lin m) per box
42 lb (19 kg) per box

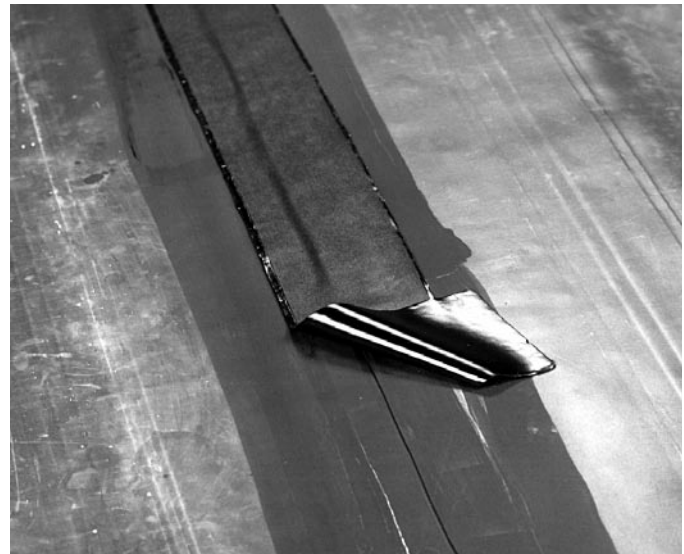

Roll Sizes

- 6" x 100' (15.24 cm x 30.48 m)
- 9" x 100' (22.86 cm x 30.48 m)
- 12" x 100' (30.48 cm x 30.48 m)

Shelf Life

One year from manufacture date when stored properly (see storage section).

Storage

Keep product clean and dry prior to application. Store indoors, out of direct sunlight, at temperatures between 60°F and 80°F (16°C and 27°C).

Application

Refer to JM EPDM Applicator Guides or Detail Drawings for instructions.

Precautions

Do not install in direct contact with asphalt or coal tar pitch.

Refer to the Material Safety Data Sheet prior to using JM EPDM Peel & Stick Sealing Strip. Material Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.