

Description

Termination Bars are 1.35" (3.4 cm) wide, roll-formed, pre-punched aluminum strips.

Anchor Discs are 2" (5.1 cm) diameter, round, Galvalume-coated steel discs.

Masonry Nail-In Anchors are one-piece zinc anchors designed for fastening to concrete or masonry walls.

Use

Termination Bars are used to attach JM Single Ply membranes to hard, rigid substrates such as masonry walls and curbs at the roof perimeter and roof projections.

Anchor Discs can be used with JM EPDM and JM TPO Reinforced Termination Strips (RTS) and/or for anchoring JM Single Ply membranes to hard, rigid substrates such as masonry walls and curbs at base details.

High Load #15 Fasteners are used to secure both the Termination Bar and Anchor Discs.

Masonry Nail-In Anchors are used to secure Termination Bars to concrete or masonry walls.

Advantages

Termination Bar:

- Convenient 10' (3.05 m) lengths
- Rigid, corrosion-resistant metal

Anchor Discs:


- Easy and fast installation

Termination Fasteners:

- Exceeds FM Global® corrosion resistance standards
- Versatile use to many substrates

Masonry Nail-In Anchors:

- One-piece expansion body and expander drive pin
- Easy installation

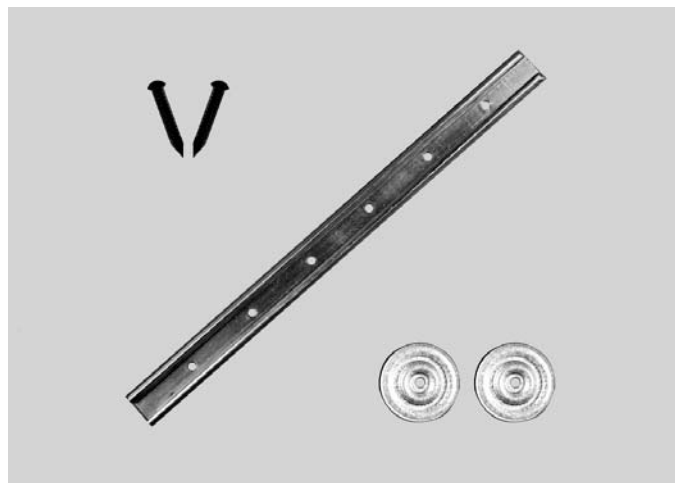

Sizes

Termination Bar

1.35" (3.4 cm) wide
10' (3.05 m) lengths
500' (152.4 m)/tube

Anchor Discs

2" (5.1 cm) diameter
1,000/box

Termination Fasteners

1¼" (3.18 cm) lengths
1,000/pail

Masonry Nail-In Anchors

1¼" (3.18 cm) lengths
1/4" (6.35 mm) diameter
1,000/box

Precautions

Refer to the Material Safety Data Sheet prior to using the JM Termination System. The Material Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.