

Description and Use

Presto Lock Coping System

The Presto Lock Coping System is a cost-effective snap-on coping system designed for use with single ply, built-up and modified bitumen roofing systems. The system consists of stainless steel anchor clips and aluminum or galvanized coping covers in a variety of thicknesses and colors.

Stainless Steel Anchor Clips

12" (30.48 cm) wide, 20 gauge (0.91 mm) base with two stainless steel clips designed to keep upward pressure on the coping cover. These are spaced 4' (1.22 m) on center and attached by #12 x 1½" (4.13 cm) hex head fasteners with Neoprene washers furnished with the system. Special approved masonry fasteners are also available upon request.

Coping Cover

Aluminum

12' (3.7 m) lengths are available in any combinations of the following gauge and finish:

- Gauges: 0.040" (1.02 mm), 0.050" (1.27 mm), 0.063" (1.6 mm), 0.080" (2.03 mm)
- Finish: Mill, Kynar 500, Clear and Colored Anodized


Galvanized

12' (3.7 m) lengths are available in any combinations of the following gauge and finish:

- Gauges: 22 gauge (0.76 mm), 24 gauge (0.61 mm)
- Finish: Plain, Kynar

Concealed Splice Plate

8" (20.32 cm) wide plate with dual butyl sealant strips of color and metal to match the coping cover. These are placed over every other anchor clip, under the coping cover joint. Cover plate joints are spaced ¾" (9.53 mm) apart.

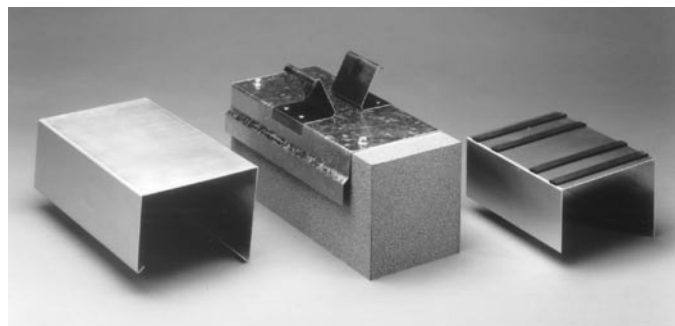

Coping Extenders

Available in lengths from 4" to 14" (10.16 cm to 35.56 cm) in metal to match the coping cover. Extenders are hooked at the bottom to a continuous cleat, fastened 12" (30.48 cm) on center. Top is fastened 12" (30.48 cm) on center.

Accessories

Factory-fabricated corners, end caps, tees, scuppers, sumps and downspouts are available with "quicklock" or welded seams.

Advantages


- Fast snap-on design
- FM Global® 1-90 Approved
- Meets criteria for SPRI Wind Design guide criteria
- 28 standard Kynar 500 colors available. Special colors available upon request
- Special sizes, shapes, metals, and arched and radiused coping available upon request
- Custom fabrication to fit exact job requirements
- Available in both tapered and flat designs. Tapered (shown below) is recommended.

Approvals/Certifications

FM Global® 1-90
SPRI Wind Design Criteria

Sizes

Varies to custom fit each job.



Refer to the Material Safety Data Sheet and product label prior to using this product.