



# Presto Stop™ Gravel Stop


For Bituminous and Single Ply Roof Systems

## Description

Presto Stop is a factory-fabricated metal edge system used to terminate the roof at the perimeter of a structure.

## Use

Presto Stop can be used with built-up, modified bitumen and single ply roofing systems. Presto Stop is an economical solution for many conditions such as continuous edge drainage with or without a gutter condition. Consultation with local building codes and overall roofing performance requirements should be considered before using this product.

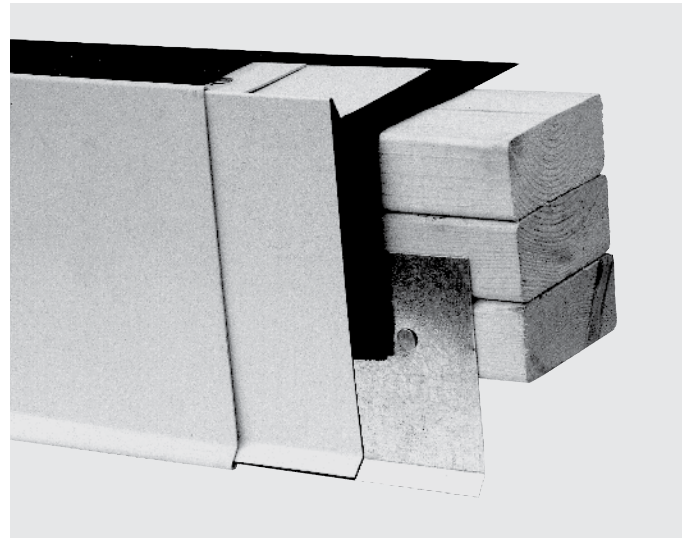

## Material Specifications

### Gravel Stop:


10' (3.05 m) lengths formed from:  
24 (0.61 mm) or 22 (0.76 mm) gauge galvanized steel with a 0.040" (1.02 mm), 0.050" (1.27 mm) or 0.063" (1.6 mm) aluminum in a mill, clear anodized, or Kynar®\* 500 finish. Other metals and finishes are available upon request, including PVC-coated metal.

### Anchor Cleat:

Galvanized continuous anchor cleat or soffit cleat is provided with all gravel stops.

## Sizes

Typical Applications:

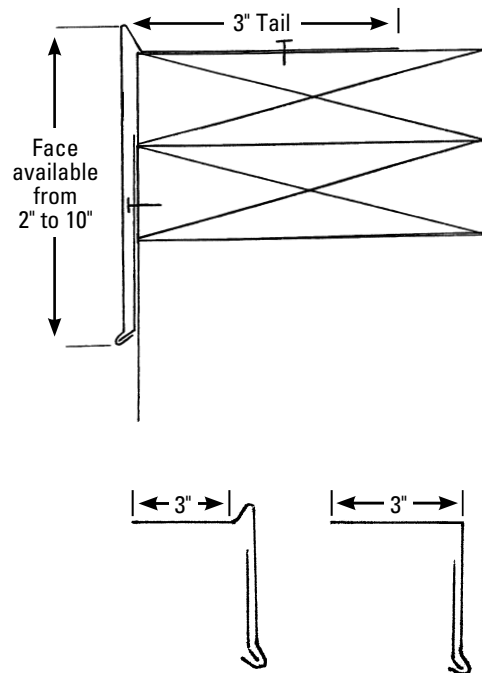

Refer to the Material Safety Data Sheet and product label prior to using this product.

\* Kynar® is a registered trademark of Arkema, Inc.