



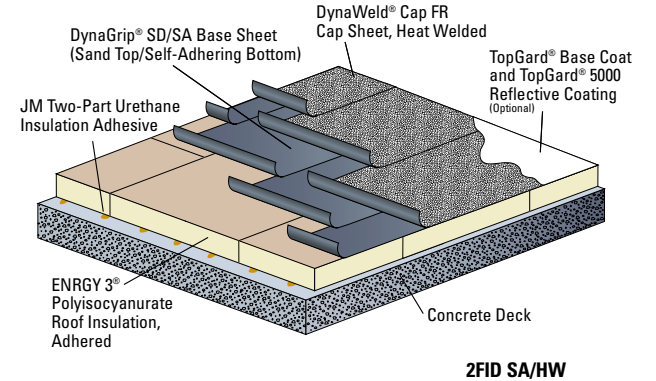

SBS Systems – Heat Welded

- The same high performance SBS modified asphalt that makes up the membrane forms the bond between plies, creating a monolithic layer of waterproofing.
- Contractors can feel confident in changing weather because these systems are immediately watertight.
- Reflective cap sheets can be incorporated to assist with LEED® points or other green roofing goals.
- Limited impact on occupants since asphalt fumes are reduced.
- PermaFlash® System allows penetration flashing to be included in the guarantee.

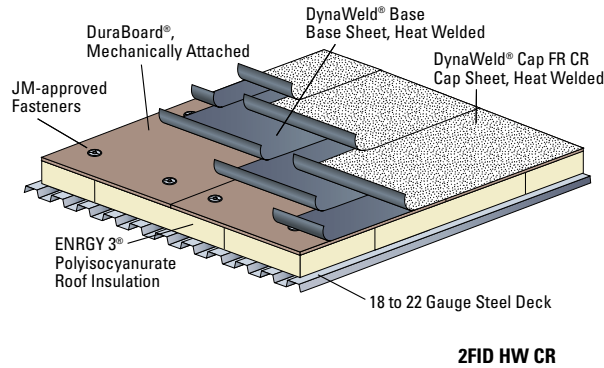

FM Global® Approvals

Note: Illustrations do not directly represent any code approvals below.

Deck	Wind Uplift (psf)	Insulation First Layer		Cover Board		Specification	Membrane	RoofNav SM Number*
		Product	Attachment Method [Rate]	Product	Attachment Method [Rate]			
Steel	90	E	Loose	DB	UF [1 per 2 ft ² (0.19 m ²)]	2FID-HW	DWB, DWC CR	1187-48573-0
	90	E	UF [1 per 2 ft ² (0.19 m ²)]	DB	2P UIA	2FID-CA/HW	DB, DWC CR	225475-225465-0
	90	E	UF [1 per 2 ft ² (0.19 m ²)]	-	-	2FID-SA/HW	DG, DWC CR	137158-137159-0
	135	E (opt.)	Loose	DB	UF [1 per 1.33 ft ² (0.12 m ²)]	2FID-HW	DWB, DWC CR	1193-48573-0
	150	E (opt.)	Loose	DB	UF [1 per 1.33 ft ² (0.12 m ²)]	2FID-HW	DWB, DWC CR	1202-48573-0
Concrete	90	E	MBR BA [1.5 gal/sq (6.01 l/m ²)]	DB	MBR BA [1.5 gal/sq (6.01 l/m ²)]	2FID-HW	DWB, DWC CR	223468-48573-0
	90	E	MBR BA [1.5 gal/sq (6.01 l/m ²)]	-	-	2FID-SA/HW	DG, DWC CR	202846-137159-0
	630	E	-	-	-	2-3FID-HW	DWB, DWC CR	1205-48574-0

Insulation E = ENRGY 3	Cover Board RF = 1/2" Retro-Fit™ Board F = Fesco® Board SR = Securock® DB = DuraBoard	Fastener and Plate UF = UltraFast®	Adhesive 2P UIA = JM Two-Part Urethane Insulation Adhesive G2P UIA = JM Green Two-Part Urethane Insulation MBR BA = MBR Bonding Adhesive	Membrane DWB = DynaWeld Base DWC CR = DynaWeld Cap FR CR DB = DynaBase DG = DynaGrip SD/SA	Notes 1. Consult specific RoofNav assembly for construction detail. 2. Deck must be FM Global approved. 3. Some assemblies require Grade E (80 ksi) steel and/or additional deck securement.
----------------------------------	--	--	--	---	--

*RoofNav numbers shown in this table are representative only and do not identify all membrane systems available.

FM Global, RoofNav and Securock are among the trademarks or registered trademarks of Factory Mutual Insurance Company, FM Approvals LLC and United States Gypsum Corporation, respectively.



JM systems meet many of the requirements for today's important building codes, approval and certifications; however, not all systems meet all requirements. For detailed information on a specific roofing system, please contact your JM Sales Representative or visit us at www.jm.com/roofing.

JM offers up to 30-year Peak Advantage® Guarantees for new construction, complete tear-off or re-cover applications.

