





SBS Systems – Mechanically Fastened

- Excellent wind uplift resistance making them ideal for perimeter and corner areas along coastal regions.
- Low-cost installation provides even lower budget projects with an option that will protect assets in high wind events.
- Base layer application is fast, ensuring critical waterproofing when install time is compressed.
- Reflective cap sheets can be incorporated to assist with achieving LEED® points or other green roofing goals.

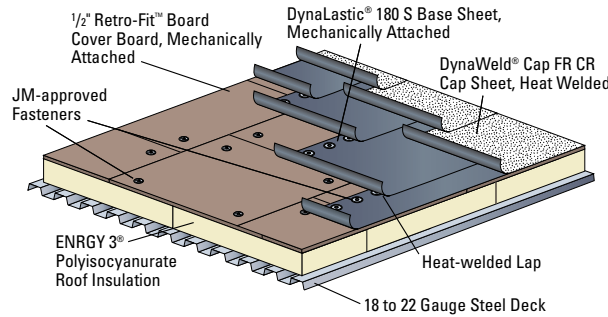

2FID MA/HW CR

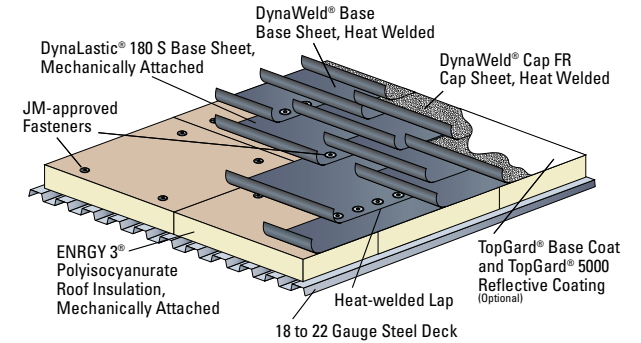

3FID MA/HW FR

Note: Illustrations do not directly represent any code approvals below.

FM Global® Approvals

Deck	Wind Uplift (psf)	Insulation First Layer		Cover Board		Base Sheet		Specification	Membrane	RoofNav SM Number*
		Product	Attachment Method (Rate)	Product	Attachment Method (Rate)	Product	Fastener [Spacing]			
Steel	135	E	Loose	RF, F	UF (5 per board)	DL180S	HL [12" (305 mm)]	2-3FID-MA/HW	DWB, DWC CR	192444-48573-0
	225	E	Loose	RF, F	UF (5 per board)	DL180S	HL [6" (152 mm)]	2FID-MA/HW	DWB, DWC CR	163472-48573-0
	300	E	UF (5 per board)	-	-	DL180S	HL [6" (152 mm)]	2FID-MA/HW	DWB, DWC CR	163476-48573-0
	300	E	Loose	RF, F	UF (5 per board)	DL180S	HL [6" (152 mm)]	2FID-MA/HW	DWB, DWC CR	163475-48573-0
Lightweight Insulating Concrete	90	-	-	-	-	DB, DL180S, GB+, GPP, VF	LWC CR 1.7" (43 mm) [7-14-14]	3FLD/3CLD/3PLD	DP, DK CR	162708-48672-51014
	90	-	-	-	-	DB, DL180S, GB+, GPP, VF	UL [9-18-18]	3FLD/3CLD/3PLD	DP, DK CR	189972-48672-51014
	120	-	-	-	-	DB, GPP	LWC CR 1.7" (43 mm) [9-12-12]	3FLD/3CLD/3PLD	DP, DK CR	181414-48636-145936
	150	-	-	-	-	DB, DL180S, GB+, GPP, VF	LWC CR 1.7" (43 mm) [7-7-7]	3FLD/3CLD/3PLD	VF, DB, DG CR	162758-48672-50916

<p>Insulation E = ENRGY 3</p> <p>Cover Board RF = 1/2" Retro-Fit Board F = Fesco® Board</p>	<p>Fastener and Plate UF = UltraFast® HL = High Load Fastener and Plate UL = UltraLok™ Locking Impact Fastener LWC = Lightweight Concrete (LWC) Base Sheet Fastener</p>	<p>Product/Membrane DL180 S = DynaLastic 180 DB = DynaBase® GB+ = GlasBase™ Plus GPP = GlasPly® Premier VF = Ventsulation® Felt DWB = DynaWeld Base DWC CR = DynaWeld Cap FR CR DG CR = DynaGlas FR CR DK CR = DynaKap FR CR</p>	<p>Notes 1. Consult specific RoofNav assembly for construction detail. 2. Deck must be FM Global approved. 3. Some assemblies require Grade E (80 ksi) steel and/or additional deck securement.</p>
---	--	---	--

*RoofNav numbers shown in this table are representative only and do not identify all membrane systems available.
FM Global, RoofNav and Securock are among the trademarks or registered trademarks of Factory Mutual Insurance Company, FM Approvals LLC and United States Gypsum Corporation, respectively.



JM systems meet many of the requirements for today's important building codes, approval and certifications; however, not all systems meet all requirements. For detailed information on a specific roofing system, please contact your JM Sales Representative or visit us at www.jm.com/roofing.

JM offers up to 30-year Peak Advantage® Guarantees for new construction, complete tear-off or re-cover applications.

