

Description

The UltraFast Fastener is a #12, case-hardened steel, polymer-coated fastener. Available with either a #3 Phillips head or a ¼" (6.35 mm) hex head. The point is designed for quick installation in new or re-roof applications.

UltraFast Locking Plastic Plates are 3" (7.62 cm) round, high strength polypropylene plates with a special locking feature.

UltraFast Metal Plates are 3" (7.62 mm) round or square, premium Galvalume®* metal plates.


Use

Use to attach roof insulation to either 18 - 26 gauge (1.2 mm - 0.5 mm) metal or wood decks. The screw and plate system provides positive attachment and resistance to uplift forces.

UltraFast Fasteners are approved to install JM roof insulation within any Peak Advantage® Guarantee.

Advantages

- The buttress thread design provides maximum pullout values and minimizes fastener backout.
- The UltraFast Locking Plastic Plate prevents fastener pop-up.
- UltraFast Fasteners exceed the corrosion resistance standards of FM Global Approval Standard #4470. UltraFast Fasteners are also Miami-Dade County Product Control Approved.

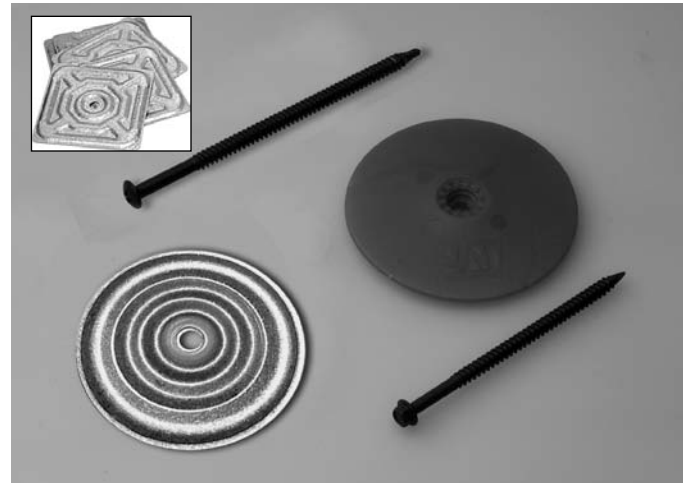

Sizes and Packaging

Fastener: 1½" to 8" (4.13 cm to 20.32 cm)
1,000/pail
(1) #3 Phillips bit in each pail
(1) ¼" (6.35 mm) hex head bit per 3 pails

Plate: 3" Metal Round or Square, 1,000/pail
3" Plastic Round, 1,000/pail

Precautions

Refer to the Material Safety Data Sheet prior to using UltraFast Fasteners and Plates. The Material Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.

*Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.