

Description

The UltraFast Pre-Assembled Fastener is a #12, case-hardened, polymer-coated steel. Available with a #3 Phillips head ($\frac{1}{4}$ " (6.35 mm) hex head is available by special order only). The point is designed for quick installation in new or reroof applications.

The UltraFast Locking Plastic Plates are 3" (7.62 cm) round, high strength polypropylene plates with a special locking feature.

The UltraFast Metal Plates are 3" (7.62 cm) round, premium Galvalume metal plates.


Use

Use to attach roof insulation to either 18 - 26 gauge (1.2 mm - 0.5 mm) metal, or wood decks. The pre-assembled screw and plate system provides positive attachment and resistance to uplift forces and is approved for use in certain FM Global systems.

UltraFast Pre-Assembled Fasteners and Plates are approved to install JM roof insulation within any Peak Advantage® Guarantee.

Advantages

- UltraFast Pre-Assembled Fasteners and Plates can reduce installation time and labor costs.
- The special thread design provides maximum pullout values and minimizes fastener backout.
- The Locking Plastic Plate prevents fastener pop-up.
- UltraFast Fasteners exceed the corrosion resistance standards of FM Global Approval Standard #4470.

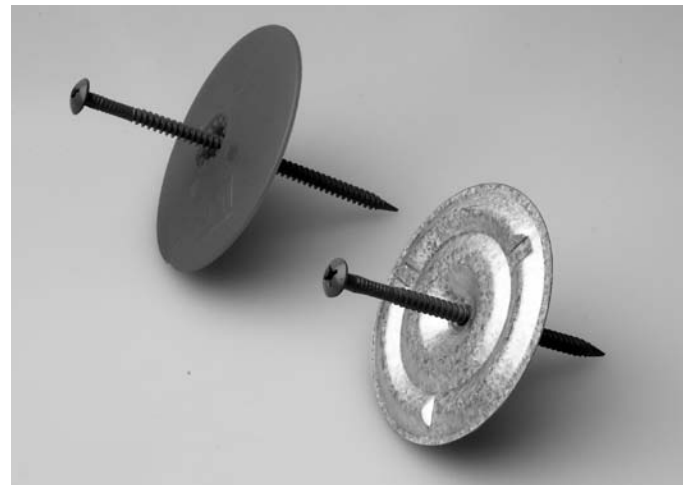

Sizes and Packaging

Fastener: $2\frac{1}{4}$ " to 8" (5.72 cm to 20.32 cm) length
A bit is provided in each box.

Precautions

Refer to the Material Safety Data Sheet prior to using UltraFast Pre-Assembled Fasteners and Plates. The Material Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.

*Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.