

High Load Pre-Assembled Fasteners and Plates

Description

High Load Fasteners are #15 fasteners with a #3 Phillips head. The point is designed for quick installation in new and re-roof applications. High Load Fasteners are pre-assembled with FM Global® approved High Load Plates.

High Load Plates are 2 $\frac{3}{8}$ " (6.03 cm) round, 20-gauge (0.9 mm) Galvalume-coated steel discs.


Use

Use to attach membranes to 18 - 26 gauge (1.2 mm - 0.5 mm) metal or wood decks. The assembled screw and plate system provides positive attachment and resistance to uplift forces.

High Load Pre-Assembled Fasteners and Plates are approved for use with any Peak Advantage® Guarantee.

Advantages

- Heavy-duty construction for enhanced holding power.
- Reduce installation time and labor costs.
- Premium corrosion-resistant coating, exceeding FM Global Approval Standard #4470 corrosion requirements.

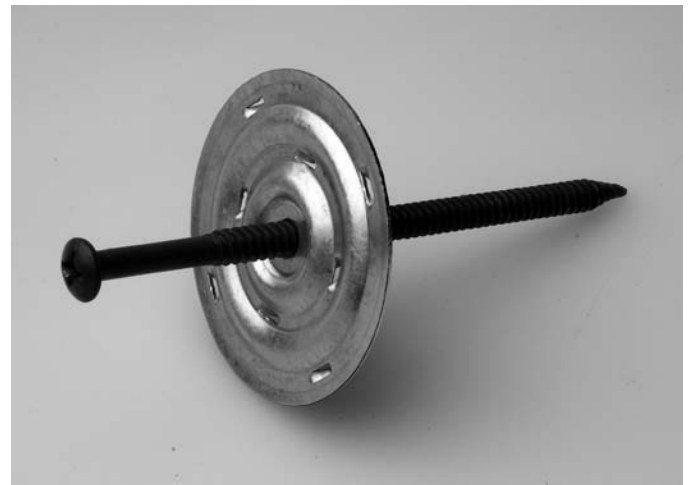

Sizes and Packaging

Fastener 2" (5.08 cm) length, 500/pail
3" to 8" (7.6 cm to 20.3 cm) lengths, 250/pail
A bit is provided in each box.

Precautions

Refer to the Material Safety Data Sheet prior to using High Load Pre-Assembled Fasteners and Plates. The Material Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.

*Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.